


## Communication Slick Joint

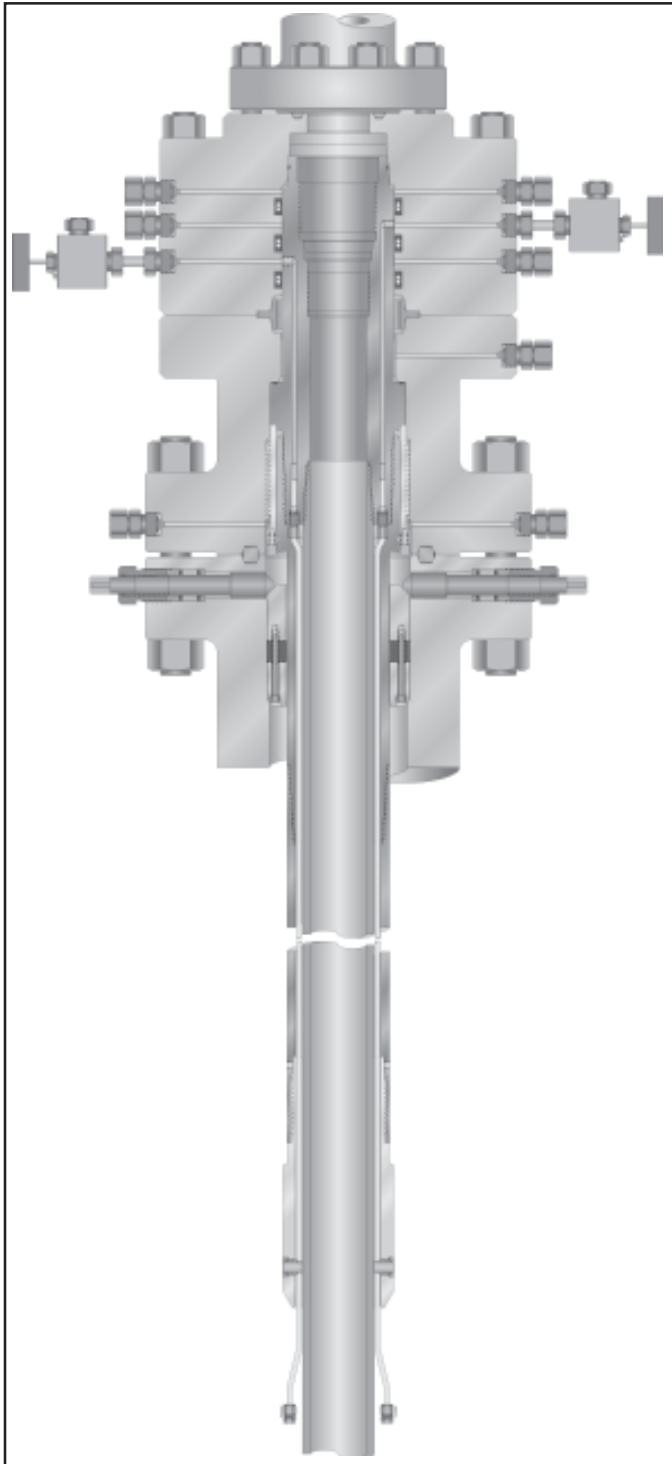

The Communication Slick Joint was designed to allow operators to reciprocate tubing up to 24 feet for displacement during completion or de-completion of a well where hydraulic control lines are necessary for downhole control valves. An annular seal is maintained with the S wrap around tubing hanger, and an external shroud provides protection for the DHCV line during controlled reciprocation while under pressure.

### Additional Features Include:

- Separate Suspension nut eliminates galling during installation and allows for easy make-up without requiring the rotation of the tree.
- PolyPak® seals separate DHCV ports, expediting installation and maximizing years of trouble-free service
- Metal seal between coupling and adapter provides leak-proof integrity
- External fitting allows testing of flow bore seal
- Modular two piece design allows for disassembly and seal access without disturbing tubing
- Shroud has an integral stop to prevent over extending during reciprocation
- Available for working pressures through 15,000 psi